


Feeds & Accessories...



**Monopoint**  
ASL-E170 (-2,-3) 1-Circuit




**Floating Feed**  
ASL-E167 (-2,-3) 1-Circuit  
ASL-E267 (-2,-3) 2-Circuit




**Conduit Continuation Kit**  
Used to jumper track runs around obstacles.  
ASL-E113/16 (-2,-3) 1-circuit  
ASL-E213/16 (-2,-3) 2-circuit



**T-Bar Feed Kit**  
Allows for feeding of track from an intersection point in a suspended ceiling application. For use with *eco* ASL-E1 & E2: 11, 14, 34, 38, 39, and 40 connectors.  
ASL-E117(-2,-3) 1 Circuit  
ASL-E217 (-2,-3) 2 Circuit



**Outlet Box Cover**  
For use with feedable *eco* connectors.  
ASL-A15 (-2,-3)

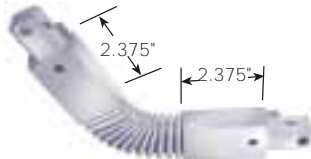

**Flexible Connector**  
ASL-E123 (-2,-3) 1-Circuit  
ASL-E223 (-2,-3) 2-Circuit



**Dead Ends**  
Included with live end feeds, live middle feeds, conduit end feeds, and L, T, & X feed connectors. May also be ordered separately.  
ASL-A41 (-2,-3)



**Track Reinforcement Plate**  
Used to strengthen mechanical connection between track sections when a linear coupler is utilized.  
ASL-A21

Mounting...



**Stem Kits**  
Includes 3/8" stem & canopy. Available in 12, 18, 24, 48 inch lengths.  
ASL-A37-12 (-2,-3)  
ASL-A37-18 (-2,-3)  
ASL-A37-24 (-2,-3)  
ASL-A37-48 (-2,-3)



**End Feed Stem Suspension Point**  
Includes bracket & cover. (Stem not included) ASL-A11 (-2,-3)



**Universal Stem Suspension Point**  
ASL-A10 (-2,-3)



**Threaded Rod Mounting Clip**  
ASL-A6



**T-bar Mounting Clip**  
ASL-A7

Field-Switchable Track Adapter...



**Adapter**  
Max. 20lbs / 600W.  
TLA-E166 (-2,-3)


NOTE: all adapters supplied with 1/8 27 IPS thread nipple for fixture connection. Grounded nipple (GEA 66GW) available upon request.




**Pre-wired Adapter**  
Same as TLA-E166, but with pre-connected 6" leads for easier fixture connection.  
TLA-E166WB (-2,-3)  
(Adapter installed; fixture to be determined)




**Transformer Adapter**  
120V / 12V / 75W – Dimmable with integral LV transformer.  
TLA-E166 (-2,-3)  
(Adapter installed; fixture to be determined)



Feeds & Track Accessories...



**Outlet Box Cover**  
ASL-A15 (-2,-3)

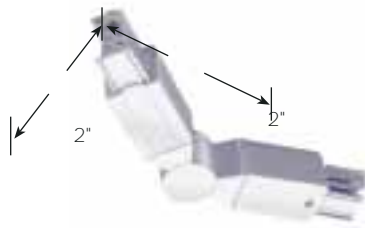

**Adjustable Connector**  
ASL-224 (-2,-3)



**Track Length & Field Cutting Tool**  
All-in-one hand tool bends conductors to manufacturer specifications and includes gauge to verify correct length.  
ASL-BT




**Dead Ends**  
Must be ordered separately.  
ASL-241 (-2,-3)

Track Adapter...



**Adapter**  
Switchable between circuits & on/off.  
Includes rotation lock.  
Max. 10lbs / 1200W.  
TLA-TEK69 (-2,-3)  
(Adapter installed: fixture to be determined)

Mounting...




**Stem Kits**  
Includes 3/8" stem & canopy. Available in 12, 18, 24, 48 inch lengths.  
ASL-SPUS-12 (-2,-3)  
ASL-SPUS-18 (-2,-3)  
ASL-SPUS-24 (-2,-3)  
ASL-SPUS-48 (-2,-3)




**Adapter**  
Switchable between circuits & on/off.  
Includes rotation lock.  
Max. 20lbs / 1200W.  
ASL-TEK68 (-2,-3)  
(Adapter installed: fixture to be determined)



**Universal Stem Suspension Point**  
Also works with cable & threaded rod suspension. Includes bracket & cover. (Stem not included)  
ASL-SP4P (-2,-3)

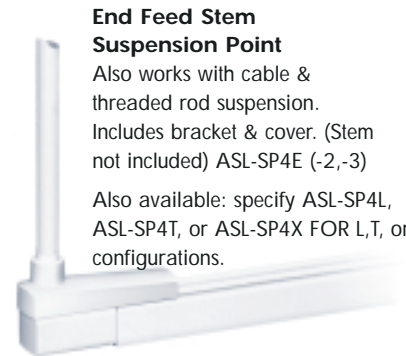

**End Feed Stem Suspension Point**  
Also works with cable & threaded rod suspension. Includes bracket & cover. (Stem not included)  
ASL-SP4E (-2,-3)  
Also available: specify ASL-SP4L, ASL-SP4T, or ASL-SP4X FOR L,T, or X configurations.

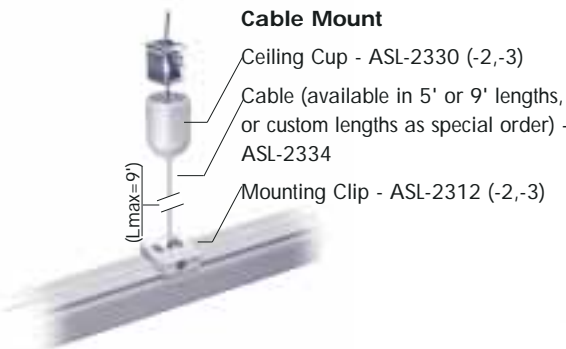

**Cable Mount**  
Ceiling Cup - ASL-2330 (-2,-3)  
Cable (available in 5' or 9' lengths, or custom lengths as special order) - ASL-2334  
Mounting Clip - ASL-2312 (-2,-3)



**Threaded Rod Mount**  
Ceiling Cup - ASL-2330 (-2,-3)  
1/4" Threaded rod furnished by others  
Mounting Clip - ASL-2312 (-2,-3)  
Plastic Covering Tube for threaded rod in 65' rolls - ASL-2332 (-2,-3)

Product Ordering Codes: Color - White (-3), Black (-2)