

SPECTRA STRIP

200, 400, 600 WATT




LED STRIPLIGHT

Features

- The Spectra Strip is a low profile LED linear wash luminaire comprised of 50W RGBA color mixing or 3000K high CRI white light engines.
- Each cell can be individually filtered, lensed or diffused using the filter slots provided.
- White light is suitable for no color wash applications, as well as tinting the RGBA light engines in a blended wash or use with traditional color media.
- Suitable for both floor and pipe mounted applications. The low-profile Spectra Strip is an LED replacement for traditional theatrical strip lights, foot lights and border lights.
- Available in 2', 4' and 6' lengths.
- ETL, cETL and CE Listed for Indoor Use
- Made in the USA

WASH LIGHTING

Catalog Numbers
STR*_**_***

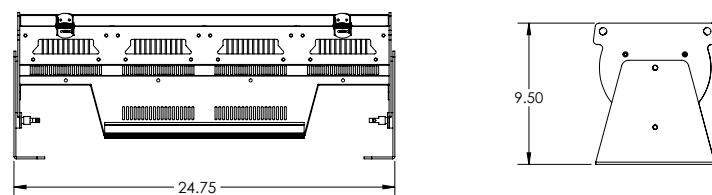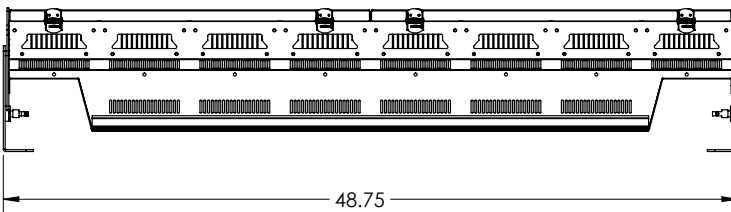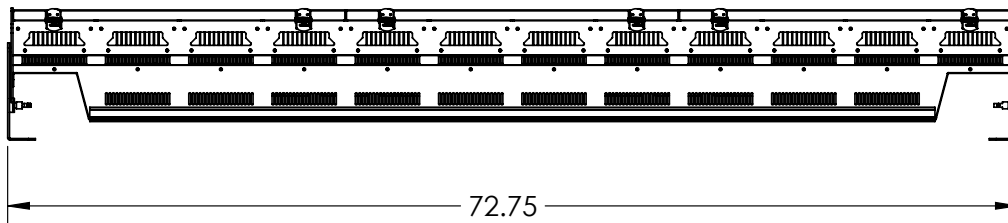

Model #	
STR*_**_***	Spectra Strip LED Array
* (Length of Strip)	2, 4, or 6
** (LED Array)	RGBA, RGBW, 3K, 6K, or 3K6K
*** (Body Color)	Add the following code for Body Color: B=Black, W=White, S=Silver, C=Custom



BRINGING IMAGINATION TO LIGHT

57 Alexander St., Yonkers, NY 10701
© 2012 Altman Stage Lighting, Inc.

Tel: 914-476-7987

Visit our website at www.altmanlighting.com

Specifications:

Materials: Construction employs all corrosion-resistant materials and hardware.

Housing: Rugged extruded and sheet aluminum construction.

Light Engine: Luxeon Rebel LED's, 50 Watt per cell. Available in standard configurations of RGBA, RGBW 3,000K White, or 3,000K - 6,000K Variable White.

Rating: Multi-Voltage; 100-240V AC 50/60 Hz universal power input.

Data Ports: DMX in and DMX through.

Power Input: Provided with 3' PowerCON to Edison PowerCON; PowerCON in and through.

Finish: Black, White or Silver TGIC polyester, electrostatic application. Custom Colors available.

Weights: Approx. 2'-16 lbs, 4'-32 lbs, 6'-48 lbs.

Included Accessories	
PCL-PBG-12-5	5' 20A PowerCON to male Edison power cable

Accessories	Description
SS-STR-LSD-601	60X1 light shaping diffuser
SS-STR-LSD-9525	95x25 light shaping diffuser
SS-STR-LSD-30	30° spread lens
SS-STR-LSD-40	40° spread lens
SS-STR-LSD-60	60° spread lens
SS-STR-FRP-FF	Filter frame (5-5/8"x5-5/8") fiber frame