

## Q-LITE OPEN FACE 1000W FLOOD LIGHT Q-LITE



The Q-LITE flood fixture is a 1000 Watt open-face luminaire that is a compact, lightweight, multipurpose flood/fill light. It is ideal for any stage, studio and location lighting application.

Designed to operate with a high-color-temperature tungsten halogen lamp, this unit is well suited for use in tight or confined spaces where maximum light output and beam spread are required for fill or flood lighting.



### Product Features:

- Ventilated steel housing
- Broad even beam
- Compact and lightweight
- Accepts a wide range of lamps (lamp not included, sold separately)
- Available in 120VAC or 230VAC
- Includes safety screen, black snoot/color frame holder, and safety cable
- Weight: 7 lbs. / 3.18 kg (approximate)
- cETLus listed for indoor use
- Made in the USA

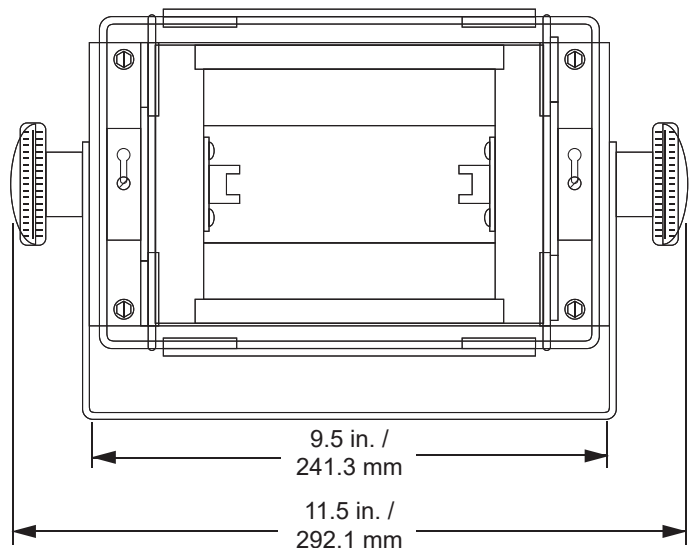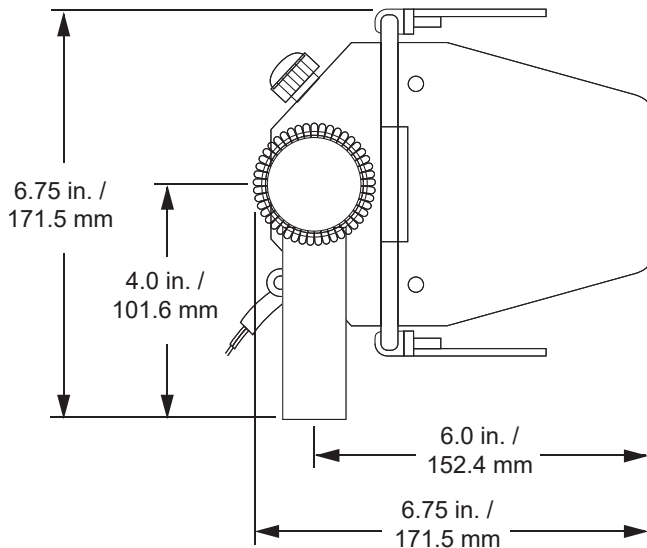

*Note: Drawing shown with optional  
4-leaf barn door (sold separately)*

**Specifications**

**Housing:** Sheet steel construction.  
**Materials:** Corrosion-resistant materials and hardware.  
**Yoke:** Rigid flat steel with dual-locking-dog tilt handles.  
**Reflector:** Peened specular aluminum.  
**Socket:** Recessed single-contact, two provided. Tool-free re-lamping.  
**Rating:** 120 or 230VAC operation, 8.3/4.2 Amps, 1000 Watts maximum.  
**Cable:** 36" Teflon® leads encased in black fiberglass sleeving.  
**Accessories:** Includes safety screen, black snoot/color frame holder, and safety cable with spring clip.  
**Finish:** Black epoxy Sandtex, electrostatic application.  
**Weight:** Approx. 7 lbs. (3.18 Kg)  
**Markings:** cETLus Listed for indoor use.

**Ordering Information**


**Q-LITE**  
 1000W Flood Light, 120VAC, Black Finish  
**Q-LITE**  
 1000W Flood Light, 230VAC, Black Finish

**Included and Optional Accessories**


**SC-36-BK** Safety Cable with Spring Clip *(included)*  
**QL-SN** Black Snoot/Color Frame Holder for Q-LITE *(included)*  
**79-0503** Q-LITE Safety Screen *(included)*  
**QL-CF** Color Frame  
**QL-BD4** Black 4-Leaf Barn Door for Q-LITE  
**F-SAS** Combination 5/8" x 1-1/8" Spigot  
**510** Malleable Iron Pipe Clamp

**Q-LITE Photometric Data with FCM (3200K) Lamp**

**VERTICAL**

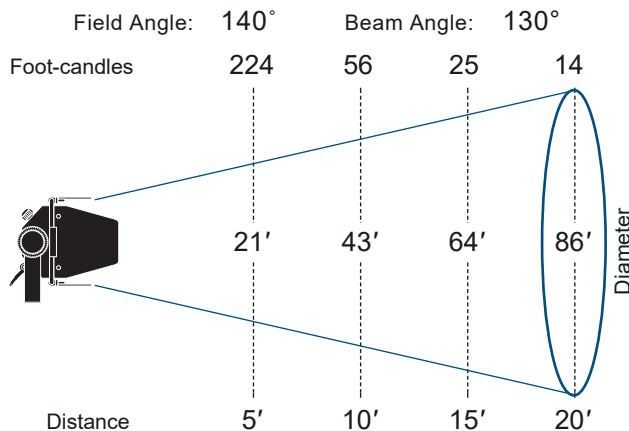

**HORIZONTAL**

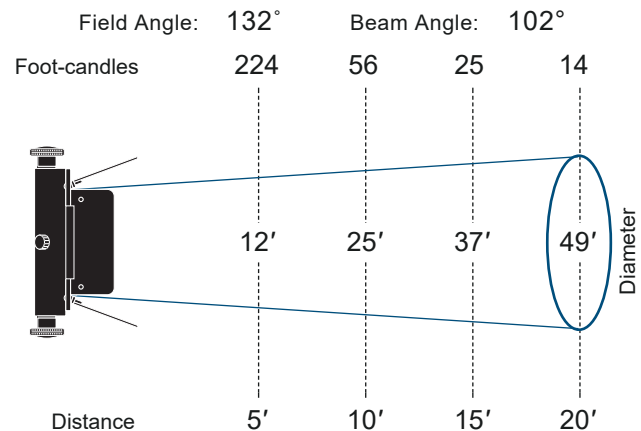

Watts	Volts	ANSI Code	Color Temp (K)	Rated Life (hrs)*	Rated Lumens*	Correction Factor	Finish
1000	120	FCM	3200	300	27,500	1.00	Clear
1000	120	FHM	3200	300	26,000	--	Frost
750	120	EJG	3200	400	20,000	0.73	Clear
750	120	EMD	3200	400	19,500	--	Frost
500	120	FDG	3200	400	13,250	0.48	Clear
500	120	FDN	3200	400	12,800	--	Frost
500	120	FCL	3000	2,000	10,950	0.40	Clear
500	120	FCZ	3000	2,000	10,700	--	Frost
300	120	EHM	2950	2,000	5,950	0.22	Clear
300	120	EHZ	2950	2,000	5,900	--	Frost
800	240	TU P2/GE23760	3200	150	22,000	--	Clear