




NIMBUS - SIDEKICK

PORTABLE LUMINAIRE




Users Manual

Features

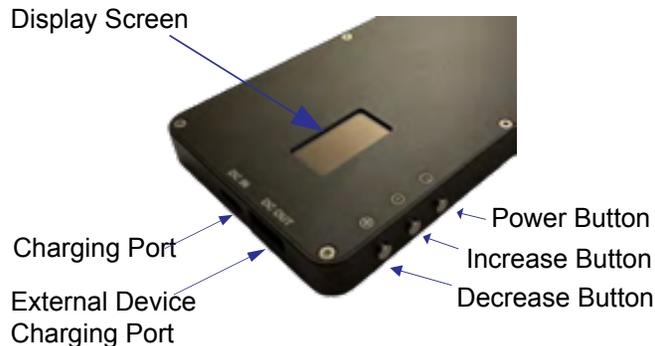

Interface

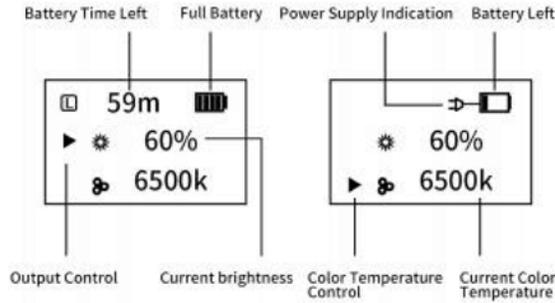

Power Supply indication: the icon will display when power is connected.
 Battery: Time left under current output, "m" stands for minute, "h" stands for hour.
 Current Output: Output under discharge condition. 100% is at max output and 5% is at lowest output.
 Current Color Temperature: Color temperature under discharge condition. 6500K represents cool white, and 3000K represents warm white.

Operation

POWER ON / OFF
 Depress and hold power button for 3 seconds to turn on or turn off power.

POWER / COLOR TEMPERATURE TOGGLE
 Touch power button briefly to switch between intensity and color temperature control.



INTENSITY CONTROL 5%-100%
 Use + and - button to increase or decrease intensity or color temperature.

COLOR TEMPERATURE CONTROL
 Use + and - button to increase or decrease color temperature.

CHARGING
 Charging Sidekick is done via the USB-C type port marked "DC IN". Maximum input voltage is 5VDC. Charging from empty to full takes approx. 3 hours.

Unit can be continuously powered via this connection during use.

EXTERNAL CHARGING
 USB-A type port marked "DC OUT". Maximum output voltage is 5VDC. 4500mAh capacity.



Usage



Shown above with Suction Cup
 *Laptop computer shown for reference and is not included



Shown with Desk Tripod and selfie stick/extension arm

Maintenance

1. Unplug charging cable after charging.
2. Battery will slowly drain when not in use. Charge battery every 3 months at a minimum.
3. Use protective bag while in transit to protect the unit from scratches.
3. Do not drop or expose to water.

Notes

1. Do not disassemble or modify.
2. Unit may become hot during use, this is normal. Allow unit to cool after use.
3. Do not expose to high temperature or humidity.

Warranty

5 Years and 1 Day. See specific terms and conditions at www.altmanlighting.com

Whats In The Box

- 1-NMB-SIDEKICK-TW
- 1-NMB-TRIPOD-B
- 1-NMB-EXTN-SS-B
- 1-NMB-SCM-B

Specifications

Material: Corrosion-resistant Materials	Weight: 7.2 oz, (204 G)
Display Screen: OLED screen	Dimensions: 5.51" x 2.87" x .39" 140mm x 73mm x 10mm
Color Rendering Index: >95	Battery: 4500mAh (Charge time 3 hrs)
Charging Port: Type-C	Light Output: 600 Lumens @ 4200K
Max Output Power: 8W	Viewing Angle: >150°
Number of LEDs: 180pcs	Control: Manual Push Button
USB Power through: 5V-1AMP	
Runtime: 100% brightness power for about 1.2 hour, 5% brightness power for about 14 hours. CCT: 3000K-6500K (±200K)	